

**POWER  
ACCESSORIES**



# BATTERY BOX USER MANUAL

**PLEASE READ AND UNDERSTAND THIS  
MANUAL BEFORE USING THE POWER BATTERY BOX**

PB003

## WARNING AND SAFETY INFORMATION

### BATTERY NOT INCLUDED

Before installing a battery in the Battery Box, ensure that you have read through all relevant product and safety information for that battery.

Do not insert foreign objects into the ports of the battery box as this may lead to electric shock

Do not submerge the battery box in liquids.

Do not attach a battery to the battery box if it or your hands are currently exposed to moisture or rain.

Do not expose the battery box to extreme temperatures.

When charging, adequate ventilation must be provided to dissipate heat and battery gases. Keep clear of naked flames, sparks or conductive material while charging a battery.

Do not attempt to disassemble the battery box as this may result in electric shock, fire or explosion. Any attempt to disassemble, perform unapproved repairs or make modifications to the battery box will void the warranty.


Always use safe lifting techniques when lifting and installing the battery box.

The battery box is not intended to be installed or operated by anyone (including children) with reduced physical or mental capabilities, or those who are under the influence of drugs or alcohol.

Ensure that you attach the correct cables to the appropriate terminals of your battery, incorrect installation could result in damage to the unit or void the warranty.

Do not use the battery box to charge medical devices.


## AT A GLANCE

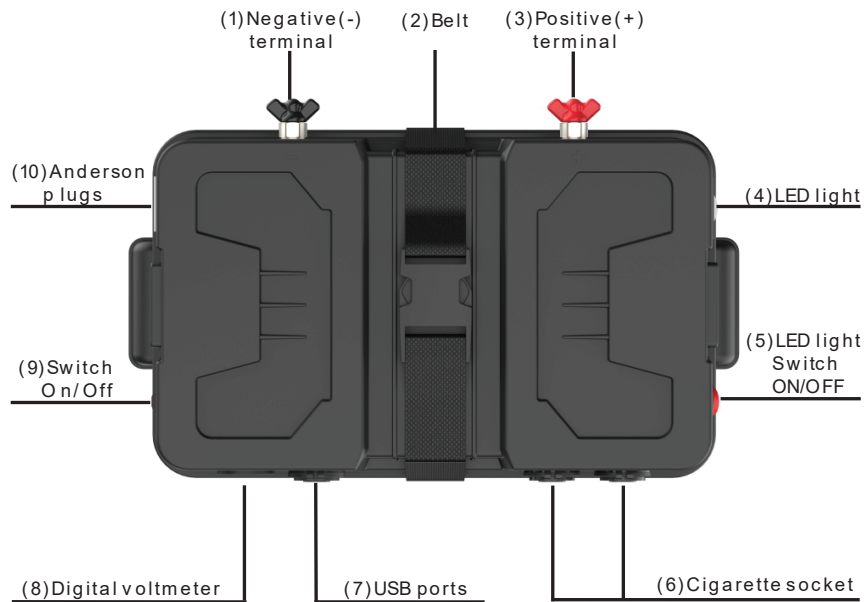

- (1) Negative(-) terminal
- (2) Belt
- (3) Positive(+) terminal
- (4) LED light
- (5) LED light switch ON/ OFF
- (6) Cigarette socket x 2 (12-24V)
- (7) USB ports (5V/2.1A 5V/1A)
- (8) Digital voltmeter
- (9) Reset Switch ON/ OFF with 16A overload protection for USB and cigarette socket
- (10) 50A Anderson plugs x 2 with 30A fuse

**WARNING:** The positive and negative terminals on the exterior of the battery box are not fused. Ensure that you install fuses or circuit breakers where necessary.

## INSTRUCTIONS FOR USE

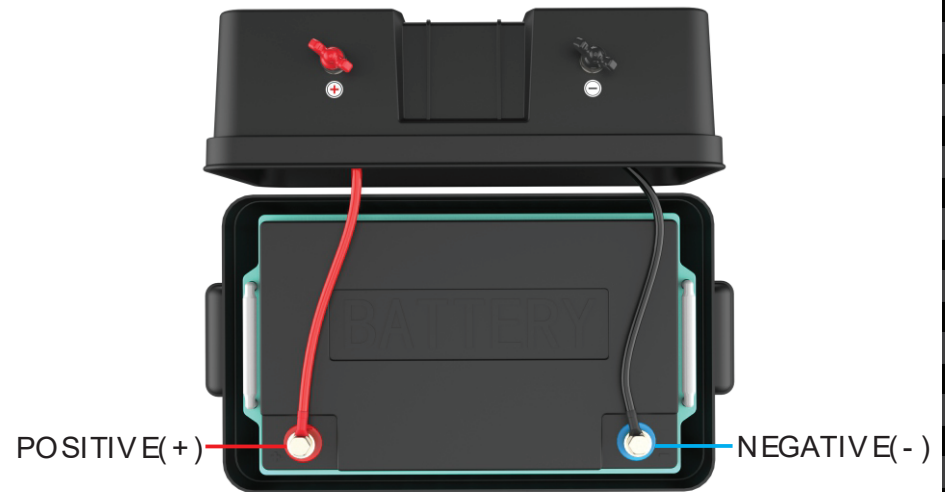

1. Remove the lid of the Battery Box.
2. Place the battery in the battery box.
3. Attach the clamps from the battery box lid to the corresponding positive and negative terminals on the battery. Fasten the bolts firmly, ensuring they will not become loose.  
**Make sure you connect the correct cable with the battery, do not reverse!**  
Red cable connects to the POSITIVE (+) post, Black cable connects to the NEGATIVE (-) post, otherwise it will damage the inverter fuse and may void the warranty. It may cause a spark when connecting the cable.



Voltmeter  
ON/OFF  
switch



LED light  
switch  
ON/OFF LED light

4. Place lid onto the battery box, making sure that it is evenly and completely shut.
5. With the lid on and the terminals connected, switch the battery to ON using the ON/OFF switch and test the voltage with the voltmeter.
6. If the voltmeter lights up and displays the battery's voltage, you can now secure the lid.
7. Turn on the LED light switch and check to see if LED light is on or not.
8. To secure the lid, thread the strap around the box and through the two plastic buckles. Fasten and secure on top of the unit.
9. You are now free to plug in your devices to power them with your battery.

## 12 MONTH LIMITED WARRANTY

### WARRANTY PERIOD:

Full 12 month warranty from date of purchase

---

### WHAT DOES THE WARRANTY COVER?

Under normal usage conditions, this warranty will cover:

- a. Legitimate proof of purchase **MUST BE PROVIDED**
- b. Any defect in design or manufacture which results in the product failing
- c. We will replace the product at our discretion providing that the fault is found to have been caused by a design or manufacturing defect and not misuse or tampering.

Our goods come with guarantees that cannot be excluded under the Consumer law.

---

### THE WARRANTY DOES NOT COVER:

1. Any damage resulting from improper use.
2. Faulty installation or modification made during installation.
3. The cost of removing and reinstalling the product.
4. Travel and/or other expenses due to customer's remote location.
5. Transport charges and damage in transit. IT is your responsibility to deliver and pick up your product, including any costs associated with the postage of your repair or replacement product. If you do freight your product we recommend that you insure against loss or damage.
6. Any loss directly or indirectly associated with the product failing to operate.
7. Damage caused by mould, insects, animals, misuse, incorrect operation, adverse weather, accidents and fair wear and tear.